

※NOTES※

MECHANICAL

- ① HOUSING : THERMOPLASTIC, UL94V-0
- ② TERMINAL : BRASS, 0.4mm SQUARE PIN

SPECIFICATION

- ① CURRENT RATING : 1 AMPHERE
- ② INSULATOR RESISTANCE : 1000 MEGOHMS MIN.
- ③ CONTACT RESISTANCE : 20 MILLIOHMS MAX.
- ④ DIELECTRIC WITHSTANDING VOLTAGE : 300V AC
- ⑤ OPERATING TEMPERATURE : -40°C ~ +105°C
- ⑥ WAVE SOLDERING TEMPERATURE : 260±5°C FOR 5 SECONDS

PRODUCT ORDER OPTION

PHD \*\* -3 \* \* R2X \*\* J7

POSITION NO.

PLATING





- A~Au 0.2~1μ OVERALL
- B~Au 3μ OVERALL
- E~Au 15μ OVERALL
- J~Sn 80~100μ OVERALL

HOUSING COLOR

- 1~BLACK 2~BEIGE
- 3~WHITE

DIMENSION CODE (RANDOM)

- A5~DIM.A=1.5mm, DIM.B=4.0mm,  
DIM.C=1.2mm, DIM.D=3.4mm
- A6~DIM.A=1.5mm, DIM.B=8.0mm,  
DIM.C=1.0mm, DIM.D=3.4mm
- (OPTIONAL)

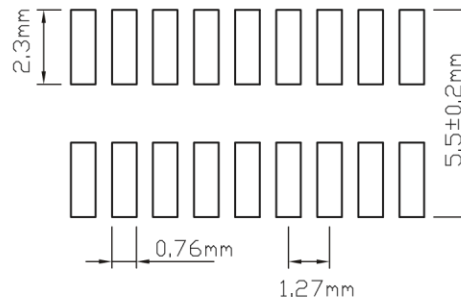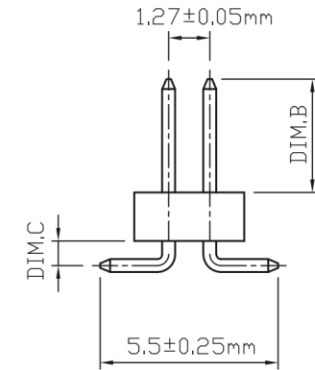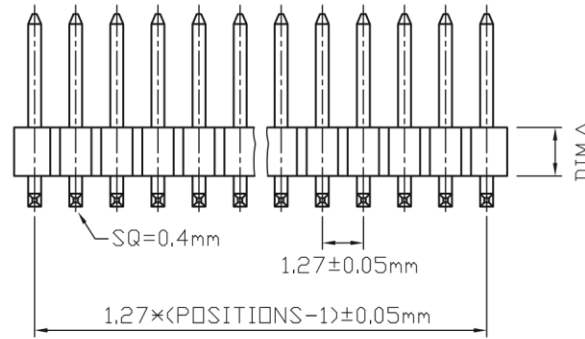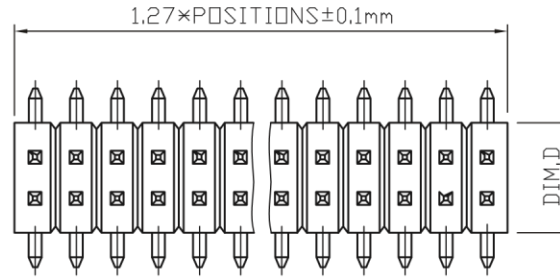

RECOMMENDED P.C.B. LAYOUT

QUALITY CONTROLING DEPARTMENT WILL PRINTED THE SYMBOL AS ★	<b>METRIC</b>		<b>Han Electronic</b>	
	DRAWER	YUHUI, SUN		
	APPROVER	P. TURNEAU	TITLE  PITCH 1.27mm, 2*N PIN HEADER CONNECTOR SMT TYPE	
DIMENSIONS ARE IN MILLIMETERS TOLERANCES				
RoHS COMPLIANT HLF HAN ELECTRONIC	X. ---- X.X ±0.20 X.XX ±0.10 X.XXX ---- ANGLES ----	PRODUCT NUMBER PHD** - **R2X** J7		
DO NOT SCALE DRAWINGS				
THIRD ANGLE PROJECTION		SIZE <b>A4</b>		SCALE NONE
		SHEET 1 OF 1		