

※NOTES※

MECHANICAL

- ① HOUSING : THERMOPLASTIC-PA6T, UL94V-0
- ② TERMINAL : BRASS

SPECIFICATION

- ① CURRENT RATING : 3 AMPHERES
- ② CONTACT RESISTANCE : 20mΩ MAX.
- ③ INSULATOR RESISTANCE : 1,000MΩ MIN.
- ④ WITHSTAND VOLTAGE : 1,000V AC/DC
- ⑤ OPERATION TEMPERATURE : -40°C ~ +105°C
- ⑥ PROCESSING PEAK-TEMPERATURE : 260°C FOR 5 SECONDS

PRODUCT ORDER OPTION

RHDA \* -3 \* \* \* 2X \*\* P7





POSITION NO. (02~40 MAX.)

PACKING METHOD  
P~MOISTURE P.E. BAG  
R~EMBOSS AND REEL  
-----

PLATING  
0~Au 0.2~1μ ON CONTACT AREA  
1~Au 3μ ON CONTACT AREA  
4~Au 15μ ON CONTACT AREA  
-----

HOUSING COLOR  
1~BLACK  
2~WHITE  
-----

DIMENSION CODE (SYS. GEN.)  
2~DIM.A=4.3mm  
3~DIM.A=4.6mm  
6~DIM.A=7.1mm  
7~DIM.A=8.0mm  
9~DIM.A=8.5mm  
-----

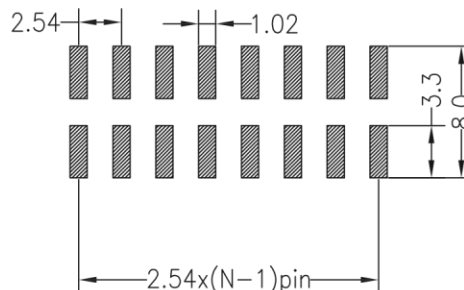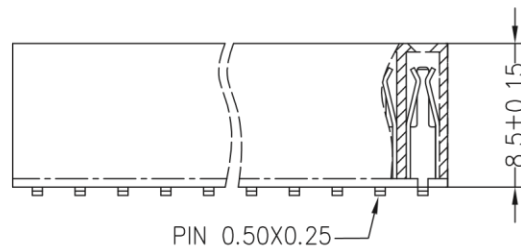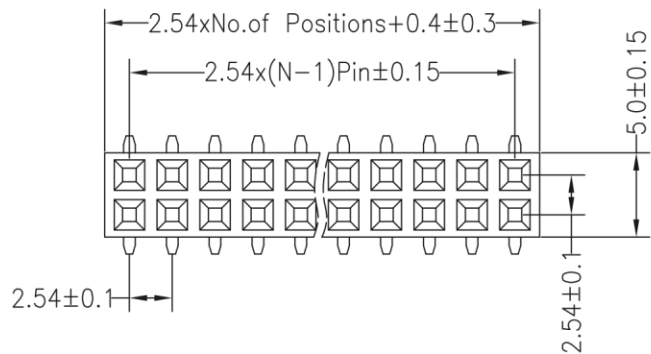

Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

QUALITY CONTROLING DEPARTMENT SHALL PRINTED THE SYMBOL AS ★	<b>METRIC</b>		<b>Han Electronic</b>
	DRAWER	Y. TOMITA	
RoHS COMPLIANT HLF HLF HLF	APPROVER	P. TURNEAU	TITLE  PITCH 2.54mm 2×N PINS, RECEPTACLE SMT, HEADER CONNECTOR
DIMENSIONS ARE IN MILLIMETERS TOLERANCES		X. ----- X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 ANGLES ±3°	
DO NOT SCALE DRAWINGS		THIRD ANGLE PROJECTION	PRODUCT NUMBER RHDA*-3***2X**P7
SIZE <b>A4</b>	REV.	SCALE NONE	SHEET 1 OF 1