

NOTES : (UNLESS OTHERWISE SPECIFIED)

MATERIAL

- HOUSING : HIGH-TEMPERATURE, UL94V-0
- CONTACT : PHOSPHOR BRONZE, T=0.30mm

SPECIFICATION

- VOLTAGE RATING : 125V AC RMS
- CURRENT RATING : 1.5AMP @ 25°C
- CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- INSULATION RESISTANCE : 500 MEGOHMS MIN.
- DIELECTRIC STRENGTH : 1,000V AC (50-60Hz)
- MATING FORCE : 2.27kgf MAX.
- UNMATING FORCE : 7.9kgf MIN.
- DURABILITY : 750 CYCLES MIN.
- OPERATION TEMPERATURE : -40*+85°C
- RELATIVE HUMIDITY LOWER 80%
- WAVE SOLDERING TEMPERATURE :
PBT - 250°C FOR 5 SECONDS
PA66 - 265°C FOR 3 SECONDS


ORDER OPTION

RR826 - x x x T008PU - F14N4NN

PLATING
 0~Au 0.2~1μ ON CONTACT AREA
 2~Au 6μ ON CONTACT AREA
 4~Au 15μ ON CONTACT AREA
 6~Au 30μ ON CONTACT AREA
 8~Au 50μ ON CONTACT AREA

HOUSING COLOR
 1~BLACK 2~BEIGE 3~WHITE
 4~GREEN 6~ORANGE 9~COOL GRAY 3u'
 A~BLUE 0~YELLOW 114C

HOUSING MATERIAL
 5~HIGH-TEMPERATURE PA66, UL94V-0
 6~HIGH-TEMPERATURE PBT, UL94V-0

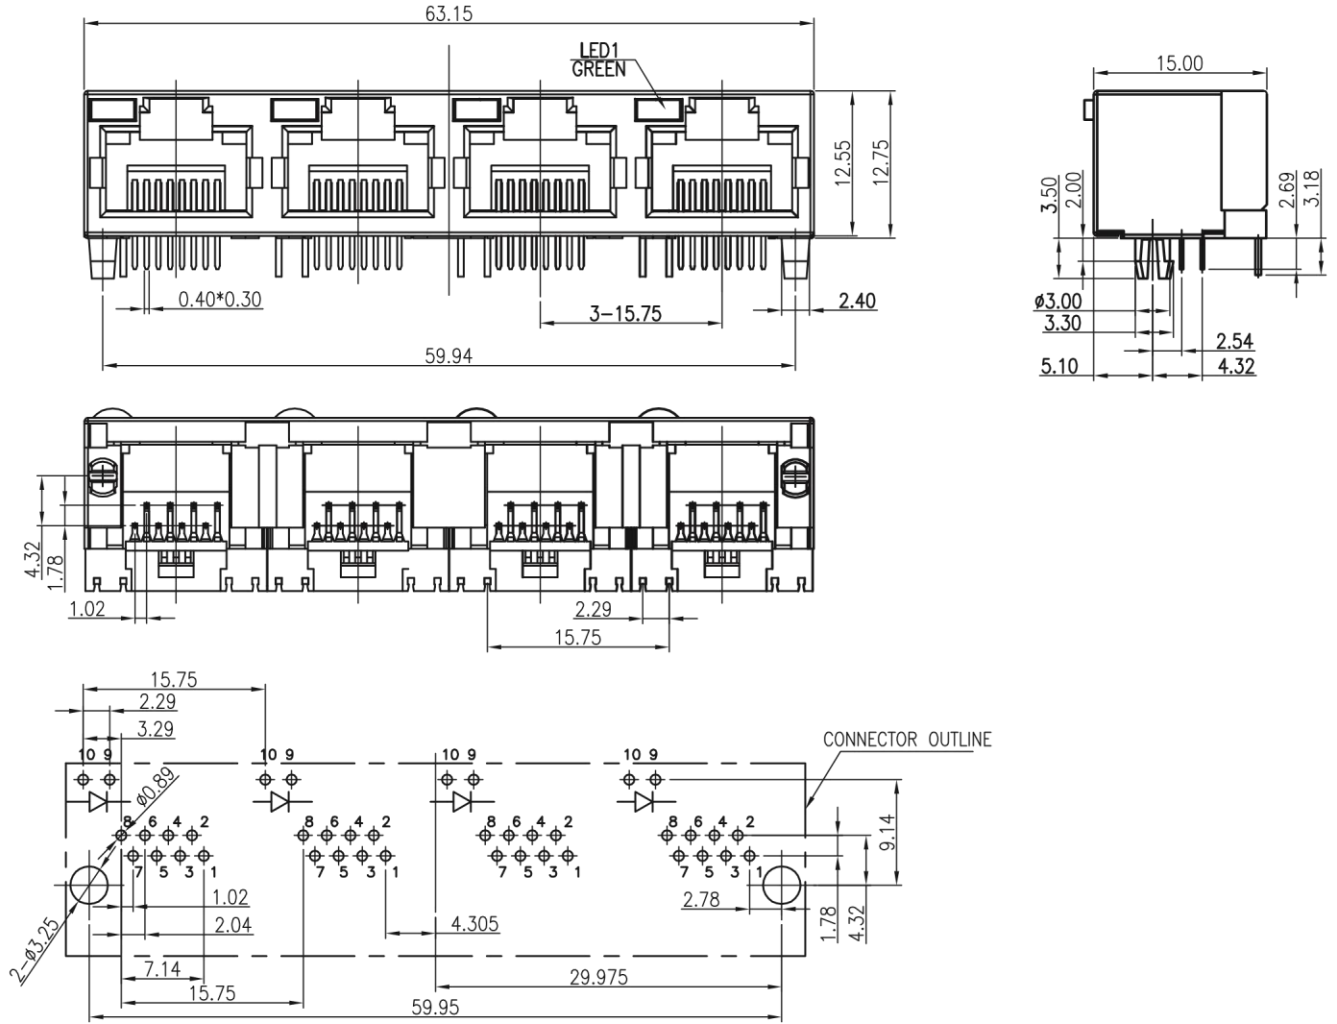

SUGGESTED PCB LAYOUT
 (TOP VIEW)
 DIMENSIONAL TOLERANCE: .XX ±0.05

RoHS Directive compliant 2002/95/EC	LEAD FREE PRODUCT	METRIC	Han Electronic
	DRAWER Y. TOMITA	TITLE RJ45 26 SERIES W/LED(LEFT GREEN) R/A THROUGH HOLE	
	APPROVER K. KITAGAWA	DIMENSIONS ARE IN MILLIMETERS TOLERANCES X.X ±0.38 X.XX ±0.30 X.XXX ±0.15 ANGULAR ±3°	
	PRODUCT NO. RR826-xxxT008PU-F14N4NN	SHEET NO. 1 OF 1	
THIRD ANGLE PROJECTION	SIZE A4	PRODUCT NO. RR826-xxxT008PU-F14N4NN	SHEET NO. 1 OF 1