

※NOTES※

MECHANICAL

- ① HOUSING : PBT+30%G.F., UL94V-0
- ② SHELL : COLD ROLLER STEEL, NICKEL PLATED
- ③ CONTACT(S) : BRASS

SPECIFICATION

- ① CURRENT RATING : 3 AMPHERES
- ② CONTACT RESISTANCE : 25 MILLIOHMS MAX.
- ③ DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC/1 MIN.
- ④ INSULATION RESISTANCE : 5000 MEGAOHMS MIN. @ DC500V
- ⑤ MATING FORCE : 341g MAX.
- ⑥ UNMATING FORCE : 21g MIN.
- ⑦ OPERATION TEMPERATURE : -55°C ~ +85°C






PRODUCT ORDER OPTION

RVGZ \* - 6 \* \* T015G1

PLATING  
 A~Au 0.2~1μ OVERALL  
 B~Au 3μ OVERALL  
 D~Au 10μ OVERALL  
 -----

HOUSING COLOR  
 1~BLACK  
 2~BEIGE  
 8~PURPLE  
 A~BLUE

RANDOM CODE  
 1~COPPER ASS'Y SCREW TYPE (4.8×10)  
 2~COPPER ATTACHED SCREW TYPE (4.8×10)  
 3~STEEL ASS'Y SCREW TYPE (4.8×10)  
 4~STEEL ATTACHED SCREW TYPE (4.8×10)

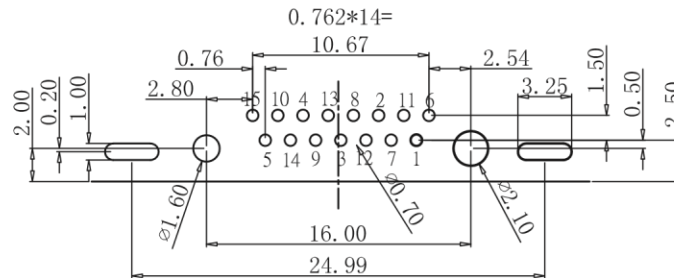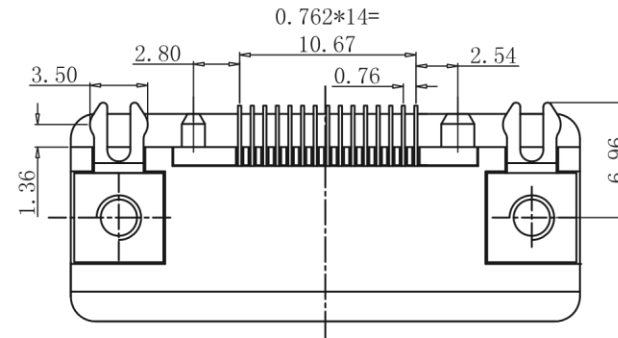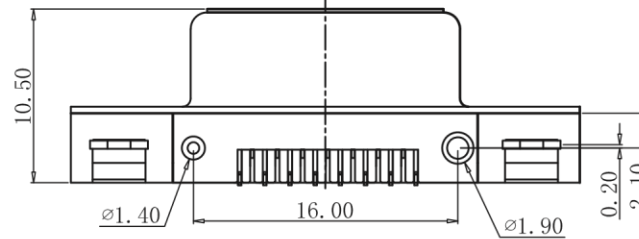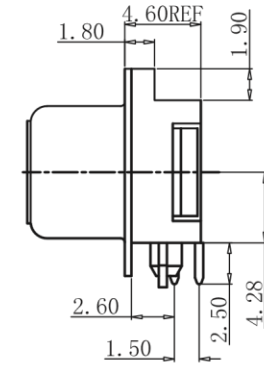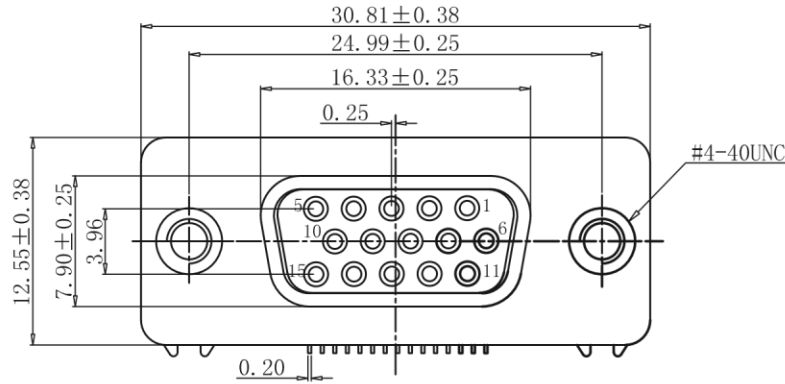

RECOMMENDED PCB LAYOUT

QUALITY CONTROLING DEPARTMENT SHALL PRINTED THE SYMBOL AS ★ RoHS COMPLIANT HLF HAN ELECTRONIC LEAD FREE	<b>METRIC</b>		<b>Han Electronic</b>	
	DRAWER SHARON			
	APPROVER P. TURNEAU		PRODUCT NUMBER RVGZ*-6**T009G1	
	DIMENSIONS ARE IN MILLIMETERS TOLERANCES		SCALE NONE	
X. ----- X.X ±0.35 X.XX ±0.25 X.XXX ±0.15 ANGLES ±2°		SHEET 1 OF 1		
DO NOT SCALE DRAWINGS		THIRD ANGLE PROJECTION		
SIZE <b>A4</b>		REV.		