

※NOTES※

MECHANICAL

- ① HOUSING : THERMOPLASTIC NYLON 66 WITH 30% GLASS FILLED UL94V-0, COLOR OPTIONAL
- ② CONTACT(S) : BRASS, WITH TIN PLATED

SPECIFICATION

- ① CURRENT RATING : 1 AMPHERE
- ② VOLTAGE RATING : 100V AC/DC
- ③ INSULATION RESISTANCE : 1,000MΩ MIN.
- ④ CONTACT RESISTANCE : 20mΩ MAX.
- ⑤ WITHSTANDING VOLTAGE : 800V AC PER MINUTE
- ⑥ TEMPERATURE RANGE : -25°C ~ +85°C
- ⑦ WAVE SOLDERING PEAK TEMPERATURE : 260±5°C FOR 5 SEC(S)




PRODUCT ORDER OPTION

RWB09 - 5 × JP0 ×× M1

CKT NO. IN TOTAL
02~13 PINS

HOUSING COLOR
1~BLACK
2~BEIGE
3~WHITE
6~ORANGE

CKT	DIM.A.	DIM.B.
02	2.00	6.10
03	4.00	8.10
04	6.00	10.10
05	8.00	12.10
06	10.00	14.10
07	12.00	16.10
08	14.00	18.10
09	16.00	20.10
10	18.00	22.10
11	20.00	24.10
12	22.00	26.10
13	24.00	28.10

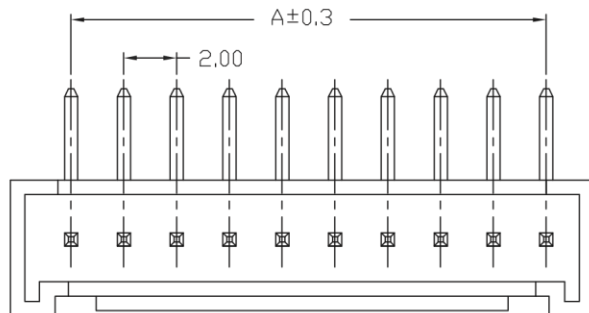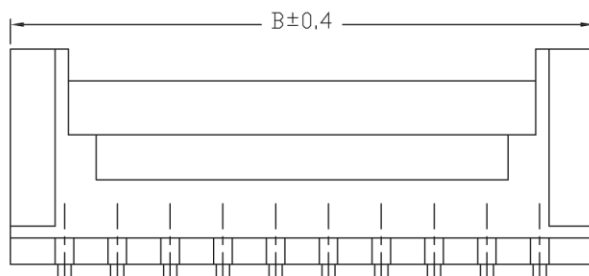

RECOMMENDED P.C.B. LAYOUT

QUALITY CONTROLING INDEPENDENTLY THROUGH THE SYMBOL AS ★	METRIC		Han Electronic	
	DRAWER	Y. TOMITA		
	APPROVER	P. TURNEAU	TITLE PITCH 2.0mm HEADER (WAFER 90°) SINGLE LAYER	
DIMENSIONS ARE IN MILLIMETERS TOLERANCES				
X. ----- X.X ±0.25 X.XX ±0.15 X.XXX ±0.08 ANGLES ±3°	DO NOT SCALE DRAWINGS		PRODUCT NUMBER RWB09-5×JP0××M1	
THIRD ANGLE PROJECTION				
SIZE A4	REV.	SCALE NONE	SHEET 1 OF 1	