

※NOTES※

MECHANICAL

- ① HOUSING : THERMOPLASTIC-NYLON 66, UL94V-0
- ② TERMINAL : BRASS

SPECIFICATION

- ① VOLTAGE RATING : 250V AC/DC
- ② CURRENT RATING : 3A AC/DC
- ③ WITHSTANDING VOLTAGE : 1,000V AC FOR 1 MINUTE
- ④ TEMPERATURE RANGE : -25°C ~ +85°C
- ⑤ INSULATION RESISTANCE : 1,000MΩ MIN.
- ⑥ CONTACT RESISTANCE : 10mΩ MAX.

PRODUCT ORDER OPTION




RWB21-5 \* \* F0 \*\* N1

CKT NO.


PLATING  
0~Au 0.2~1μ ON CONTACT AREA  
J~Sn 30~80μ OVERALL

HOUSING COLOR  
1~BLACK  
2~WHITE

CKT	DIM.A	DIM.B
02	2.50	7.50
03	5.00	10.00
04	7.50	12.50
05	10.00	15.00
06	12.50	17.50
07	15.00	20.00
08	17.50	22.50
09	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.00	40.00
16	37.50	42.50

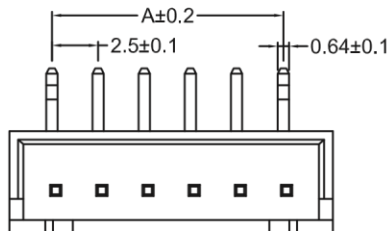

Recommand PCB Layout



QUALITY CONTROL IS CHECKED AND ALL PRODUCTS THE SYMBOL AS	<b>METRIC</b>		<b>Han Electronic</b>
	DRAWER	Y. TOMITA	
	APPROVER	P. TURNEAU	
RoHS COMPLIANT	DIMENSIONS ARE IN MILLIMETERS TOLERANCES		TITLE  PITCH 2.50mm WIRE TO BOARD CONNECTOR PLUG, HOUSING
	X.	----	
HIF	X.X	±0.38	
	X.XX	±0.25	
LEAD FREE	X.XXX	±0.10	
	ANGLES	±2°	
	DO NOT SCALE DRAWINGS		
	THIRD ANGLE PROJECTION		PRODUCT NUMBER RWB21-5**F0**N1
SIZE A4	REV.	SCALE 2.5 : 1	SHEET 1 OF 1