

※NOTES※

MECHANICAL




- 1. HOUSING : THERMOPLASTIC-LCP, UL94V-0
- 2. TERMINAL : PHOSPHOR BRONZE

PRODUCT ORDER OPTION


RWB36-1 * * * 0 ** H7

CKT NO.
 PACKING METHOD
 R~EMBOSS AND REEL
 F~TUBE
 PLATING
 0~Au 0.2~1μ ON CONTACT AREA.
 1~Au 3μ ON CONTACT AREA
 J~Sn 80-100μ OVERALL
 HOUSING COLOR
 1~BLACK
 2~WHITE

CKT	DIM.A	DIM.B	DIM.C
02	1.2	2.6	4.2
03	2.4	3.8	5.4
04	3.6	5.0	6.6
05	4.8	6.2	7.8
06	6.0	7.4	9.0
07	7.2	8.6	10.2
08	8.4	9.8	11.4
09	9.6	11.0	12.6
10	10.8	12.2	13.8
11	12.0	13.4	15.0
12	13.2	14.6	16.2
13	14.4	15.8	17.4
14	15.6	17.0	18.6
15	16.8	18.2	19.8

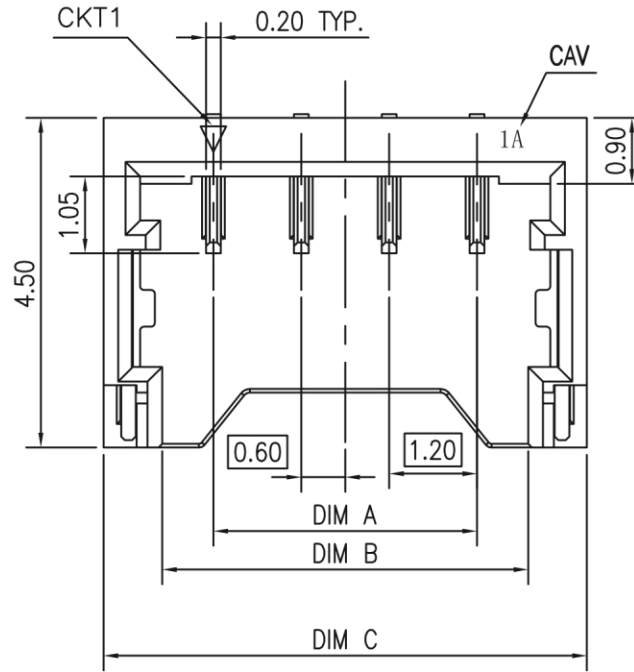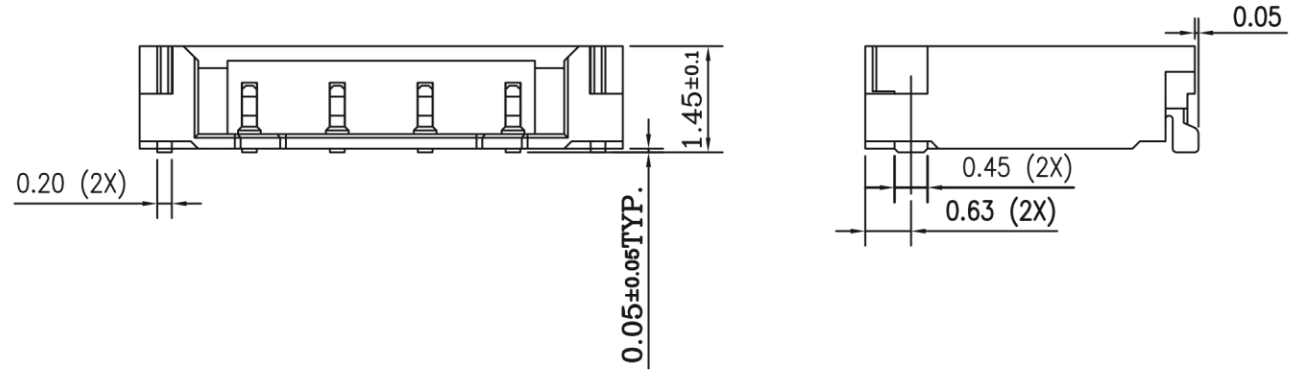

QUALITY CONTROLING DEPARTMENT SHALL PRINTED THE SYMBOL AS ★	METRIC		Han Electronic
	DRAWER	Y. TOMITA	
	APPROVER	P. TURNEAU	TITLE
	DIMENSIONS ARE IN MILLIMETERS TOLERANCES		PITCH 1.20mm WIRE TO BOARD CONNECTOR RECEPTACLE, SMT PUSH-TYPE
RoHS COMPLIANT HFP LEAD FREE	X. ±0.50 X.X ±0.25 X.XX ±0.15 X.XXX ±0.10 ANGLES ±2°	DO NOT SCALE DRAWINGS THIRD ANGLE PROJECTION	
SIZE A4	REV.	SCALE 1 : 1	SHEET 1 OF 2

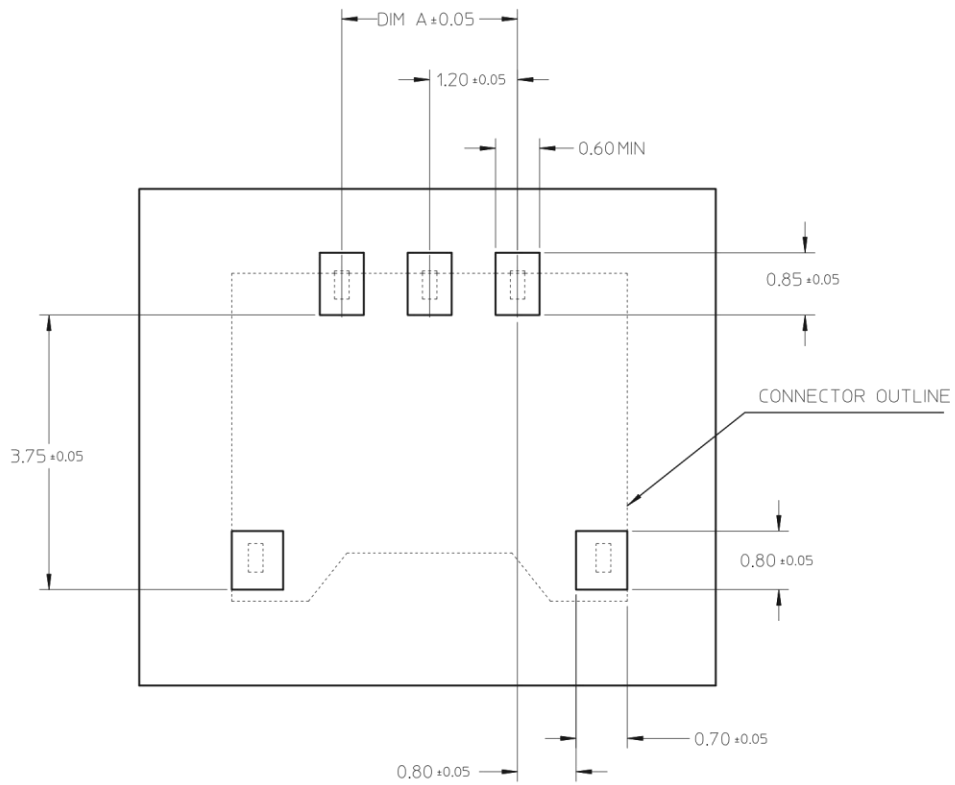

RECOMMENDED P.C.B. LAYOUT

QUALITY CONTROLING DEPENDABLE PROUD THE SYMBOL AS ★	METRIC		Han Electronic	
	DRAWER	Y. TOMITA		
	APPROVER	P. TURNEAU	TITLE PITCH 1.20mm WIRE TO BOARD CONNECTOR RECEPTACLE, SMT PUSH-TYPE	
DIMENSIONS ARE IN MILLIMETERS TOLERANCES				
RoHS COMPLIANT	X.	±0.50	DO NOT SCALE DRAWINGS THIRD ANGLE PROJECTION	
	X.X	±0.25		
	X.XX	±0.15		
	X.XXX	±0.10		
	ANGLES	±2°		
HIF HIGHER LEVEL	PRODUCT NUMBER RWB36-1**x0**xH7			
ISO LEAD FREE	SIZE A4	REV.	SCALE 1 : 1	SHEET 2 OF 2