

※NOTES※

MECHANICAL

- ① HOUSING : THERMOPLASTIC-LCP, UL94V-0, BLACK
- ② CONTACT(S) : COPPER ALLOY
- ③ SHIELD : STAINLESS STEEL






SPECIFICATION

- ① CURRENT RATING : 0.5 AMPERE
- ② DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S.
- ③ INSULATION RESISTANCE : 500MΩ MIN. PER
- ④ CONTACT RESISTANCE : 30mΩ MAX.
- ⑤ OPERATION CYCLES : 5,000 CYCLES MIN.
- ⑥ OPERATION TEMPERATURE : -55°C ~ +85°C
- ⑦ WAVE SOLDERING PEAK TEMPERATURE : 265°C FOR 10 SEC(s)

PRODUCT ORDER OPTION

ZCR03-11 * R006P3

PLATING
 0~Au 0.2~1μ ON CONTACT AREA
 2~Au 3μ ON CONTACT AREA
 4~Au 15μ ON CONTACT AREA

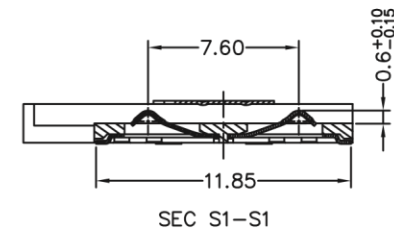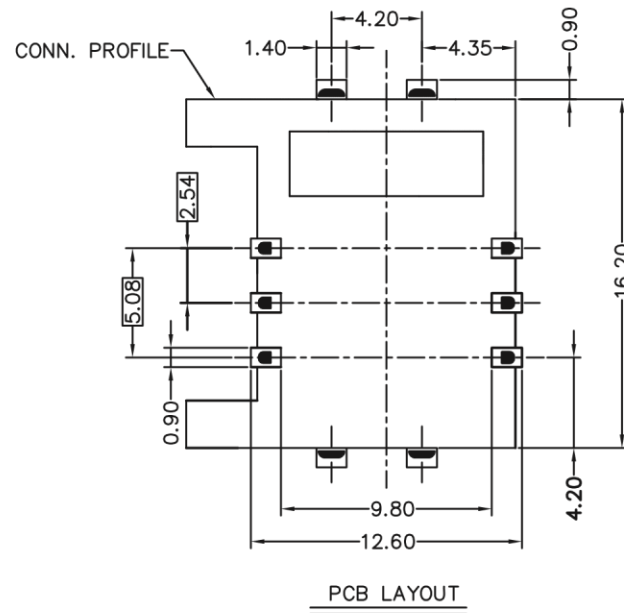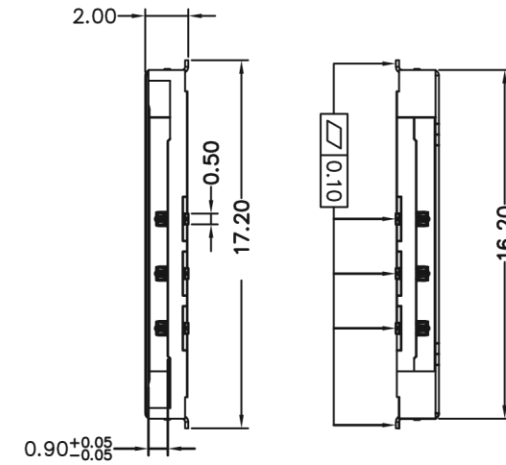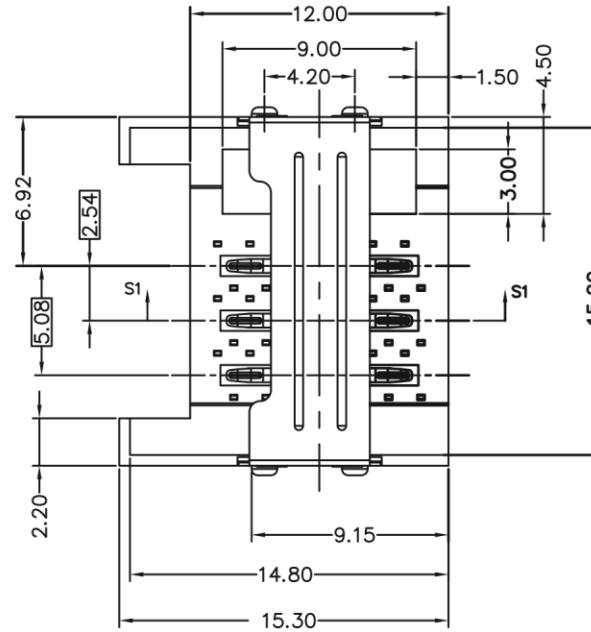

QUALITY CONTROL 品質管理 THE SYMBOL AS ★ RoHS COMPLIANT HFP COMPLIANT LEAD FREE	METRIC		Han Electronic	
	DRAWER Y. TOMITA			
	APPROVER P. TURNEAU		TITLE SIM CARD CONNECTOR 2.00mm HEIGHT	
	DIMENSIONS ARE IN MILLIMETERS TOLERANCES			
X. ----- X.X ±0.15 X.XX ±0.10 X.XXX ±0.08 ANGLES ±1°		PRODUCT NUMBER ZCR03-11×R006P3		
DO NOT SCALE DRAWINGS		THIRD ANGLE PROJECTION		
SIZE A4	REV.	SCALE NONE	SHEET 1 OF 1	