

※NOTES※

MECHANICAL

- ① HOUSING : THERMOPLASTIC-PA6T, UL94V-0
- ② CONTACT : BRASS, SQ=0.64mm

SPECIFICATION

- ① CURRENT RATING : 3 AMPS
- ② INSULATION RESISTANCE : 1000MΩ MIN.
- ③ CONTACT RESISTANCE : 20mΩ MAX.
- ④ WITHSTANDING VOLTAGE : 1000V AC
- ⑤ OPERATION TEMPERATURE : -40°C ~ +105°C
- ⑥ WAVE SOLDERING PEAK TEMPERATURE : 260°C FOR 10 SECONDS

PRODUCT ORDER OPTION

PHD \*\* -3 \* \* \* 2X \*\* P7

POSITION NO. (02~40 MAX.)





PACKING METHOD  
P~MOISTURE P.E. BAG  
R~EMBOSS & REEL  
-----

PLATING  
A~Au 0.2~1μ OVERALL  
B~Au 3μ OVERALL  
E~Au 15μ OVERALL  
J~Sn 80~100μ OVERALL  
-----

HOUSING COLOR  
1~BLACK            2~BEIGE  
3~WHITE  
-----

DIMENSION CODE (RANDOM)  
Q1~DIM.A=2.5, DIM.B=8.0, DIM.C=4.0  
E1~DIM.A=2.0, DIM.B=8.0, DIM.C=3.2  
E2~DIM.A=2.0, DIM.B=8.35, DIM.C=3.2  
C0~DIM.A=1.5, DIM.B=2.0, DIM.C=3.5  
B0~DIM.A=1.0, DIM.B=4.0, DIM.C=3.2  
-----

<DIM.B AND DIM.C IS OPTIONAL>

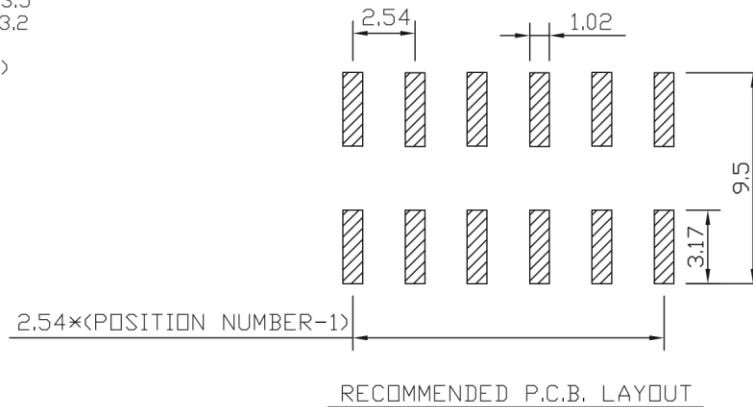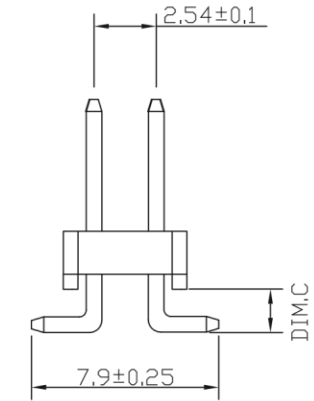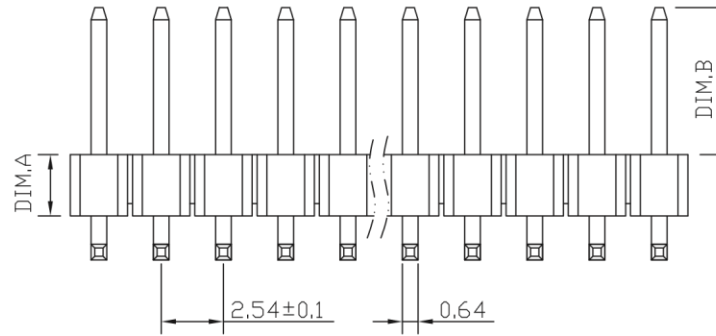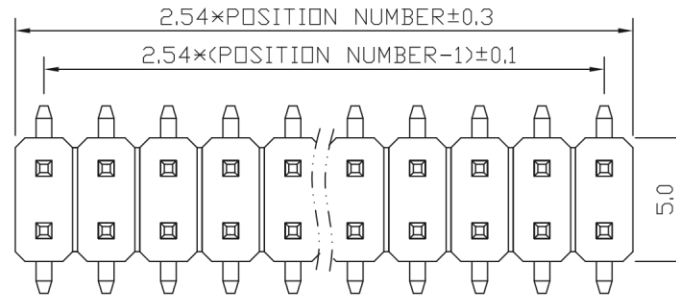

QUALITY CONTROLING DEPARTMENT SHALL PRINTED THE SYMBOL AS ★	<b>METRIC</b>	<b>Han Electronic</b>
	DRAWER K. KITAGAWA APPROVER Y. TOMITA	
RoHS COMPLIANT HFP HAN ELECTRONIC	DIMENSIONS ARE IN MILLIMETERS TOLERANCES X.            ±0.30 X.X          ±0.20 X.XX        ±0.10 X.XXX       --- ANGLES     ±1°	TITLE PITCH 2.54mm, 2*N PINS HEADER, PLUG CONNECTOR SURFACE MOUNT TYPE
	DO NOT SCALE DRAWINGS THIRD ANGLE PROJECTION	PRODUCT NUMBER PHD**-3***2X**P7
SIZE <b>A4</b>	REV.	SCALE NONE
		SHEET 1 OF 1