

※NOTES※

MECHANICAL

- ① HOUSING : THERMOPLASTIC, UL94V-0
- ② TERMINAL : PHOSPHOR BRONZE

SPECIFICATION

- ① CURRENT RATING : 1 AMP
- ② CONTACT RESISTANCE : 20mΩ MAX.
- ③ INSULATOR RESISTANCE : 1,000MΩ MIN.
- ④ WITHSTAND VOLTAGE : 500V AC/DC
- ⑤ OPERATION TEMPERATURE : -40°C ~ +105°C
- ⑥ PROCESSING PEAK-TEMPERATURE :
PBT - 230°C FOR 20 SECONDS
PA6T - 260°C FOR 5 SECONDS

PRODUCT ORDER OPTION

RHDC * - * * * * 2X ** J6

POSITION NO. (02~40 MAX.)





PACKING METHOD
P~MOISTURE P.E. BAG
T~TUBE

PLATING
0~Au 0.2~1μ ON CONTACT AREA
1~Au 3μ ON CONTACT AREA
4~Au 15μ ON CONTACT AREA

HOUSING COLOR
1~BLACK
2~WHITE

HOUSING MATERIAL
3~PA6T, UL94V-0
6~PBT, UL94V-0

DIMENSION CODE (SYS. GEN.)
1~DIM,A=2.0mm
3~DIM,A=2.2mm
5~DIM,A=4.3mm
7~DIM,A=4.6mm
0~DIM,A=8.5mm

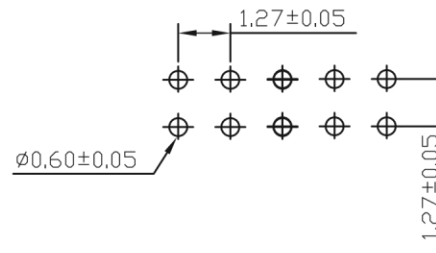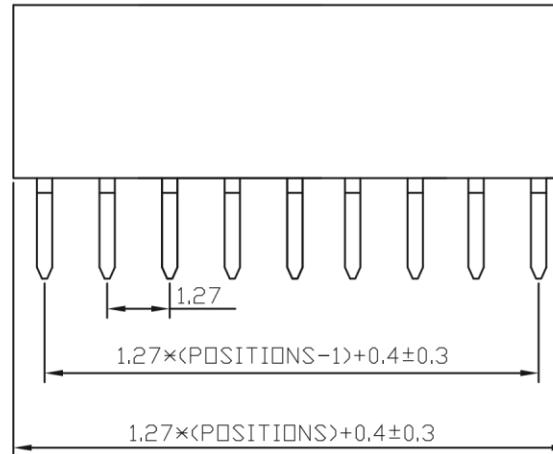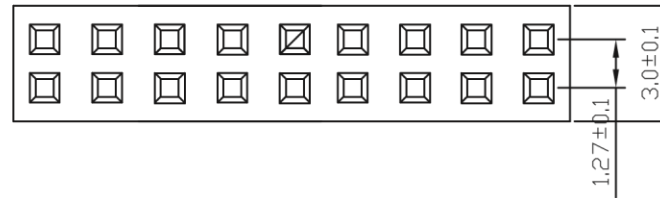

RECOMMENDED P.C.B. LAYOUT

QUALITY CONTROLING DEFECTS AND ALL PROBLEMS THE SYMBOL AS ★	METRIC		Han Electronic	
	DRAWER	Y. TOMITA		
RoHS COMPLIANT HLF HIGHER LIFE LEAD FREE	APPROVER	P. TURNEAU	TITLE PITCH 1.27mm 2×N PINS, RECEPTACLE THT, HEADER CONNECTOR	
DIMENSIONS ARE IN MILLIMETERS TOLERANCES				
	X.	±0.30	PRODUCT NUMBER RHDC*-***2X**J6	
	X.X	±0.15		
	X.XX	±0.05		
	X.XXX	----		
	ANGLES	±5°		
DO NOT SCALE DRAWINGS			THIRD ANGLE PROJECTION	
SIZE	A4	SCALE		