

※NOTES※

MECHANICAL

- 1 HOUSING & INSERT : PBT, UL94V-0, BLACK
- 2 CONTACT : PHOSPHOR BRONZE, $\phi 0.46\text{mm}$

SPECIFICATION

- 1 VOLTAGE RATING : 150V AC RMS
- 2 CURRENT RATING : 1.5 AMPERES
- 3 CONTACT RESISTANCE : 20 MILLIOHMS MAX.
- 4 INSULATION RESISTANCE : 1000 MEGOHMS MIN. @ 500V DC
- 5 DIELECTRIC STRENGTH :
CONTACT TO CONTACT : 1000V DC OR AC PEAK
@0.5mA 50Hz OR 60Hz A MINUTE
- 6 OPERATING LIFE : 750 CYCLES MIN.
- 7 MATING/UNMATING FORCE : 30N, MAX.
- 8 RETENTION STRENGTH : 50N FOR 60±5SECS
- 9 STORAGE TEMPERATURE : -40°C ~ +85°C
- 10 OPERATION TEMPERATURE : -40°C ~ +85°C
- 11 GUARANTEE PERIOD : 12 MONTHS


※※ MATES WITH MODULAR PLUG CONFORMING TO TIA-1096 & IEC-60603

ORDER OPTION

RR659 - 61 × T ××× PM - R21NNNN

POSITIONS
6P6~ 6P6C
6P4~ 6P4C

PLATING
A~Au 0.2~1 μ OVERALL
B~Au 3 μ OVERALL

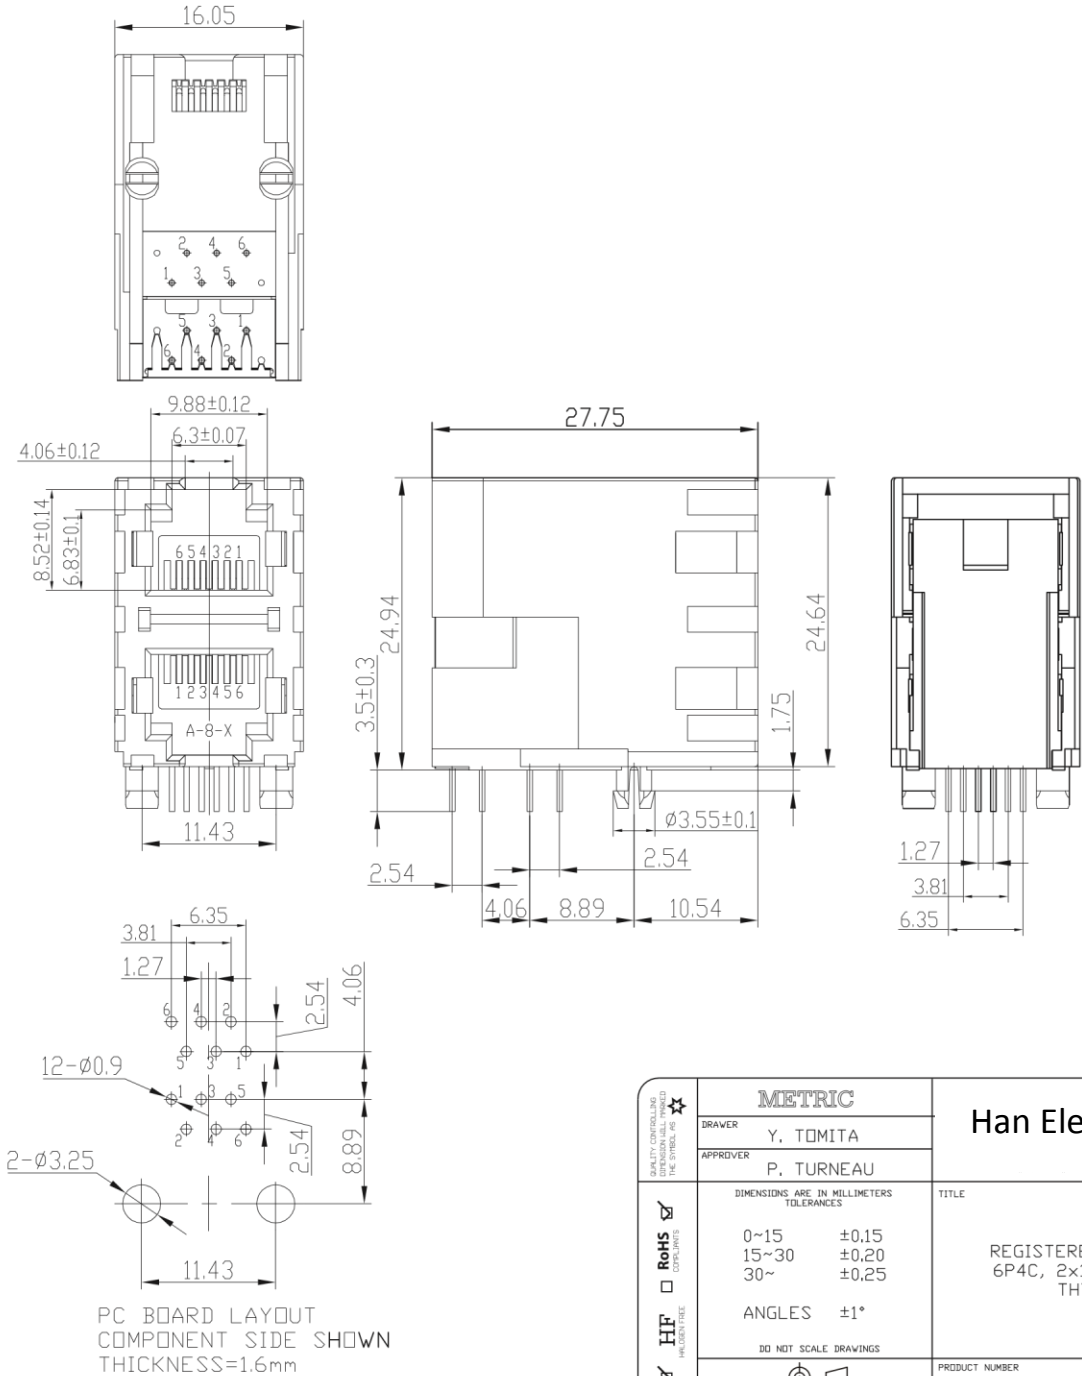

PC BOARD LAYOUT
COMPONENT SIDE SHOWN
THICKNESS=1.6mm

QUALITY CONTROLING RESPONSIBILITY PROVIDED THE SYMBOL AS	METRIC		Han Electronic
	DRAWER	Y. TOMITA	
RoHS COMPLIANT HLF HIGHER LIFE LEAD FREE	APPROVER	P. TURNEAU	TITLE REGISTERED JACK 6P4C, 2x1 PORTS THT
	DIMENSIONS ARE IN MILLIMETERS TOLERANCES		
	0~15	±0.15	PRODUCT NUMBER RR659-61×T×××PM-R21NNNN
	15~30	±0.20	
	30~	±0.25	
	ANGLES	±1°	DO NOT SCALE DRAWINGS THIRD ANGLE PROJECTION
SIZE	A4	SCALE	
	REV.		SHEET 1 OF 1