

NOTES : (UNLESS OTHERWISE SPECIFIED)

MATERIAL

- HOUSING : THERMOPLASTIC, UL94V-0
- CONTACT : COPPER ALLOY, T=0.15mm
- SHIELD : COPPER ALLOY, T=0.30mm






SPECIFICATION

- VOLTAGE RATING : 30V AC
- CURRENT RATING :
1.0A FOR PIN#2,3,4 (WHEN APPLYING CURRENT TO SIGNAL)
1.8A FOR PIN#1,5 (WHEN APPLYING CURRENT TO POWER)
0.5A FOR PIN#2,3,4 (WHEN APPLYING CURRENT TO POWER)
- INSULATION RESISTANCE : 100 MΩ MIN. @ 100V AC
- DIELECTRIC WITHSTANDING VOLTAGE : 100V (RMS) AC FOR 1 MINUTES
- CONTACT RESISTANCE : 30mΩ MAX.
- OPERATING TEMPERATURE : -30°C ~ +80°C

ORDER OPTION

RU804 - 11 × R00513

- PLATING
- 0-Au 0.2~1μ ON CONTACT AREA
 - 1-Au 3μ ON CONTACT AREA
 - 2-Au 6μ ON CONTACT AREA
 - 4-Au 15μ ON CONTACT AREA
 - 6-Au 30μ ON CONTACT AREA

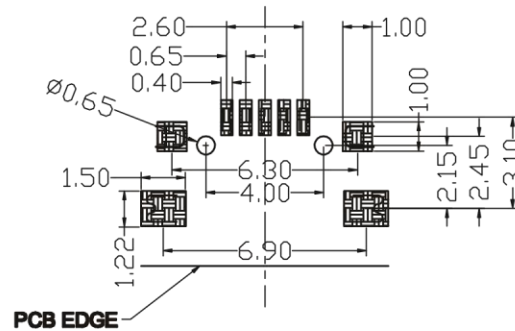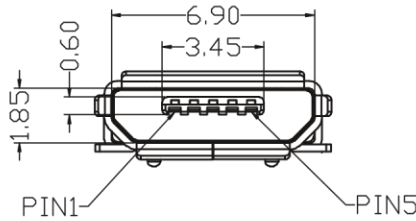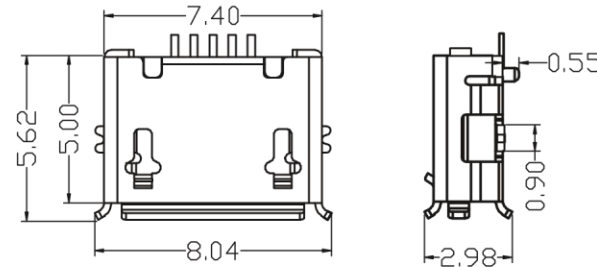

RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05

RoHS Directive compliant 2002/95/EC LEAD FREE PRODUCT DRAWER YOKOHAMA APPROVER TAKASHI DIMENSIONS ARE IN MILLIMETERS TOLERANCES X.X ±0.35 X.XX ±0.25 X.XXX ±0.15 ANGULAR ±3° THIRD ANGLE PROJECTION SIZE A4	METRIC	Han Electronic
	TITLE MICRO USB 5 PINS RECEPTACLE (WITH POST)	
	PRODUCT NO. RU804-11×R00513	
	SHEET NO. 1 OF 1	