

※NOTES※





MECHANICAL

- ① HOUSING : THERMOPLASTIC-PA6T, COLOR BEIGE, UL94V-0
- ② TERMINAL : COPPER ALLOY, TIN PLATED (REFLOW TREATMENT)
- ③ SOLDER TAB : BRASS, TIN PLATED (REFLOW TREATMENT)

SPECIFICATION

- ① CURRENT RATING : 1 AMPHERES AC/DC
- ② VOLTAGE RATING : 250V AC/DC
- ③ INSULATION RESISTANCE : 1,000MΩ MIN.
- ④ WITHSTANDING VOLTAGE : 800V AC FOR ONE MINUTE
- ⑤ CONTACT RESISTANCE : 20mΩ MAX.
- ⑥ OPERATION TEMPERATURE : -25°C ~ +85°C
- ⑦ WAVE SOLDERING TEMPERATURE
THERMOPLASTIC-PA6T : 260±5°C FOR 10±1SECS

※※ MATES WITH WIRES P/N : PWB06 SERIES PRODUCT

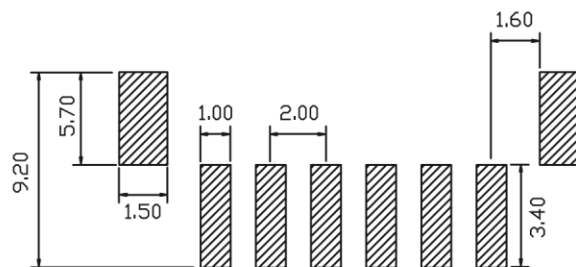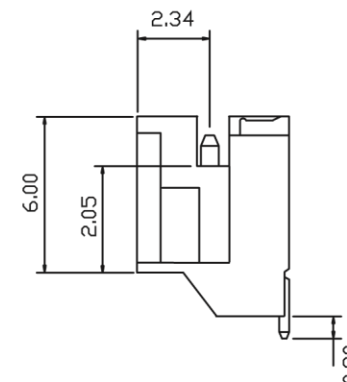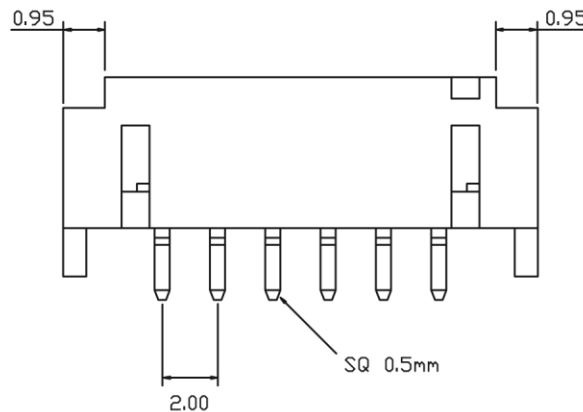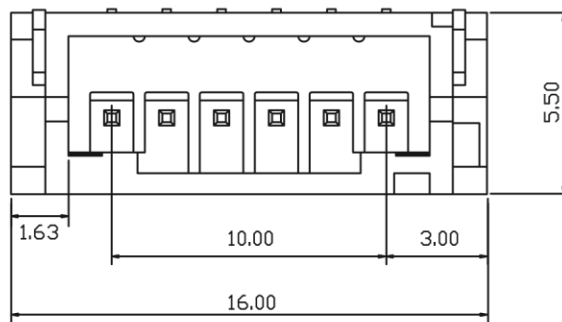

P.C.B. LAYOUT
TOLERANCE±0.05mm

QUALITY CONTROLING DEPARTMENT WILL PROVIDE THE SYMBOL AS ★	METRIC		Han Electronic
	DRAWER	ELLEN (GLH)	
	APPROVER	SKY (GLH)	TITLE PITCH 2.00mm, 6 PINS CRIMP STYLE, SMT TYPE SIDE ENTRY SHROUDED HEADER (H=5.50mm)
DIMENSIONS ARE IN MILLIMETERS TOLERANCES	X. ---- X.X ±0.38 X.XX ±0.25 X.XXX ---- ANGLES ±3°		
DO NOT SCALE DRAWINGS			PRODUCT NUMBER RWB22-32JR006M3
SIZE A4	REV.	SCALE NONE	SHEET 1 OF 1