

※NOTES※

MECHANICAL

- ① HOUSING : THERMOPLASTIC NYLON 66 WITH 30% GLASS FILLED UL94V-0, COLOR OPTIONAL
- ② CONTACT(S) : BRASS WITH TIN PLATED

SPECIFICATION

- ① CURRENT RATING : 1 AMPHERE
- ② VOLTAGE RATING : 100V AC/DC
- ③ INSULATION RESISTANCE : 1,000MΩ MIN.
- ④ CONTACT RESISTANCE : 20mΩ MAX.
- ⑤ WITHSTANDING VOLTAGE : 800V AC PER MINUTE
- ⑥ TEMPERATURE RANGE : -25°C ~ +85°C
- ⑦ WAVE SOLDERING PEAL TEMPEATURE : 260±5°C FOR 5 SEC(s).





PRODUCT ORDER OPTION

RWB07-5 × JP0 ×× M6

CKT NO. IN TOTAL
04~40 PINS

HOUSING COLOR
1~BLACK
2~BEIGE
3~WHITE
6~ORANGE

CKT	DIM.A.	DIM.B.
04	2.00	6.00
06	4.00	8.00
08	6.00	10.00
10	8.00	12.00
12	10.00	14.00
14	12.00	16.00
16	14.00	18.00
18	16.00	20.00
20	18.00	22.00
22	20.00	24.00
24	22.00	26.00
26	24.00	28.00
28	26.00	30.00
30	28.00	32.00
32	30.00	34.00
34	32.00	36.00
36	34.00	38.00
38	36.00	40.00
40	38.00	42.00

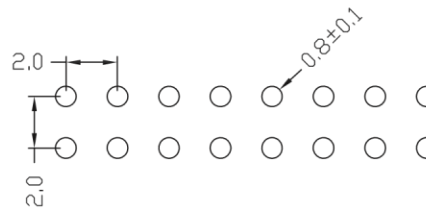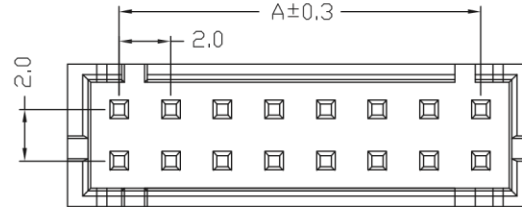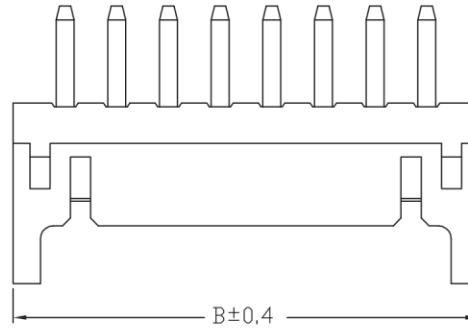

RECOMMENDED P.C.B. LAYOUT

QUALITY CONTROLING DEPARTMENT HAS PROVIDED THE SYMBOL AS ★	METRIC		Han Electronic	
	DRAWER	Y. TOMITA		
RoHS COMPLIANT	APPROVER	P. TURNEAU	DIMENSIONS ARE IN MILLIMETERS TOLERANCES X. ----- X.X ±0.25 X.XX ±0.15 X.XXX ±0.08 ANGLES ±3°	
	DO NOT SCALE DRAWINGS			
HIF HIGHER LEAD FREE	THIRD ANGLE PROJECTION		TITLE PITCH 2.0 HEADER (WAFER) 180° DUAL LAYER	
	SIZE	A4		
RoHS COMPLIANT	SCALE	1 : 1	SHEET 1 OF 1	
	REV.			