

NOTES : (UNLESS OTHERWISE SPECIFIED)

MATERIAL

- HOUSING : THERMOPLASTIC, UL94V-0
- CONTACT : PHOSPHOR BRONZE, T=0.15mm
- SOLDER PEG : BRASS, T=0.20mm

ORDER OPTION





RWB08 - × 1 × R0××F3

POSITION NUMBER


PLATING
 0~Au 0.2~1μ ON CONTACT AREA
 1~Au 3μ ON CONTACT AREA
 2~Au 6μ ON CONTACT AREA
 L~Sn 200~300μ OVERALL

HOUSING
 1~THERMOPLASTIC-LCP, UL94V-0, Hg Free
 3~THERMOPLASTIC-PA6T, UL94V-0



PDS NO.	Dim. A	Dim. B	Dim. C	Dim. D
02	0.80	1.90	3.78	3.04
03	1.60	2.70	4.58	3.84
04	2.40	3.50	5.38	4.64
05	3.20	4.30	6.18	5.44
06	4.00	5.10	6.98	6.24
07	4.80	5.90	7.78	7.04
08	5.60	6.70	8.58	7.84
09	6.40	7.50	9.38	8.64
10	7.20	8.30	10.18	9.44
11	8.00	9.10	10.98	10.24
12	8.80	9.90	11.78	11.04
13	9.60	10.70	12.58	11.84
14	10.40	11.50	13.38	12.64
15	11.20	12.30	14.18	13.44
16	12.00	13.10	14.98	14.24
17	12.80	13.90	15.78	15.04
18	13.60	14.70	16.58	15.84
19	14.40	15.50	17.38	16.64
20	15.20	16.30	18.18	17.44

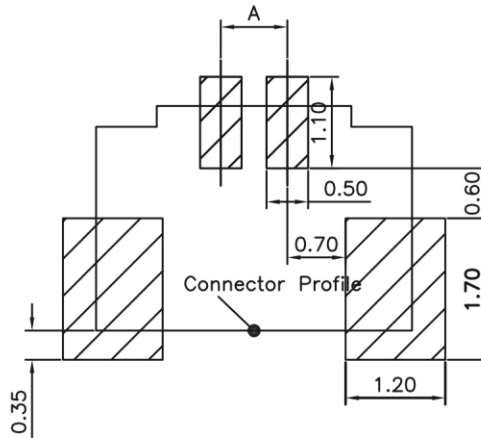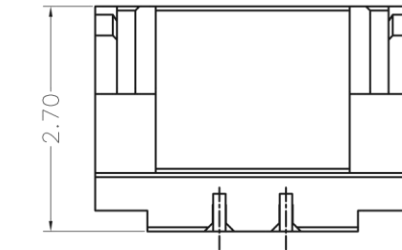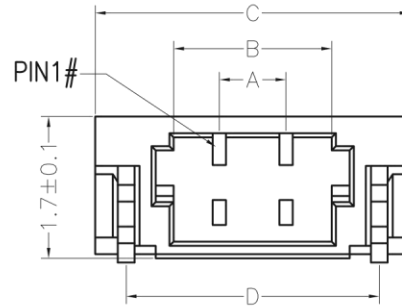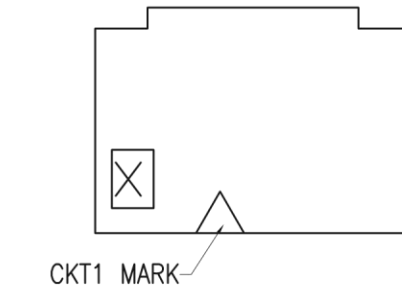

RECOMMENDED CIRCUIT BOARD LAYOUT
 DEFAULT TOLERANCE ±0.05mm

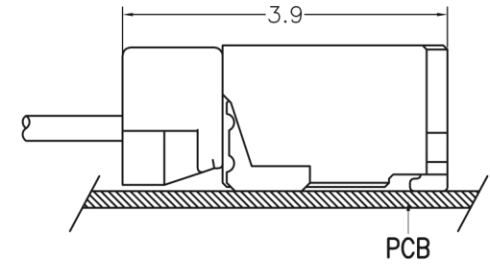

MATING CONDITION

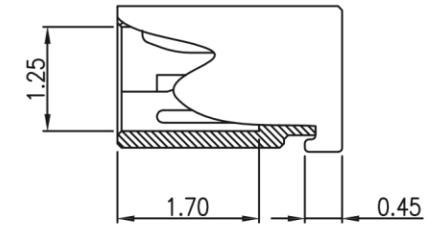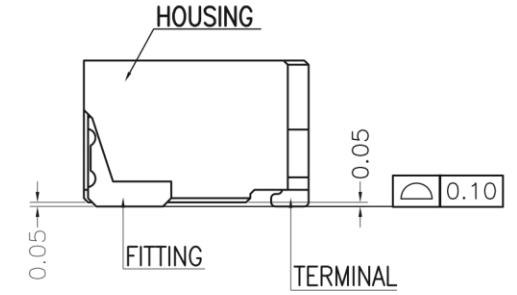

SECTION A-A

RoHS Directive compliant 2002/95/EC LEAD FREE PRODUCT (Pb)	METRIC	Han Electronic
	DRAWER K. FUJIKAWA APPROVER L. HEARST	
	DIMENSIONS ARE IN MILLIMETERS TOLERANCES X. ±0.50 X.X ±0.25 X.XX ±0.15 X.XXX ±0.10 ANGULAR ±2°	TITLE WIRE TO BOARD PITCH 0.80mm R/A, SMT TYPE
	THIRD ANGLE PROJECTION	SIZE A4