

※NOTES※

MECHANICAL

- ① HOUSING : THERMOPLASTIC-PA6T, COLOR BEIGE, UL94V-0
- ② TERMINAL : COPPER ALLOY, TIN PLATED (REFLOW TREATMENT)
- ③ SOLDER TAB : BRASS, TIN PLATED (REFLOW TREATMENT)

SPECIFICATION

- ① CURRENT RATING : 3 AMPHERES AC/DC
- ② VOLTAGE RATING : 250V AC/DC
- ③ INSULATION RESISTANCE : 1,000MΩ MIN.
- ④ WITHSTANDING VOLTAGE : 1,000V AC FOR ONE MINUTE
- ⑤ CONTACT RESISTANCE : 20mΩ MAX.
- ⑥ OPERATION TEMPERATURE : -25°C ~ +85°C
- ⑦ WAVE SOLDERING TEMPERATURE
THERMOPLASTIC-PA6T : 260±5°C FOR 10±1SECS

※※ MATES WITH WIRES P/N : PWB22 SERIES PRODUCT






PRODUCT ORDER OPTION

RWB22 - 32J ※ 0 ※※ N3

CKT NO.
02~16PINS

PACKING METHOD
P~P.E. MOISTURED BAG
R~EMBOSS AND REEL

CKT	DIM.A.	DIM.B.	DIM.C.
02	2.5	5.9	10.0
03	5.0	8.4	12.5
04	7.5	10.9	15.0
05	10.0	13.4	17.5
06	12.5	15.9	20.0
07	15.0	18.4	22.5
08	17.5	20.9	25.0
09	20.0	23.4	27.5
10	22.5	25.9	30.0
11	25.0	28.4	32.5
12	27.5	30.9	35.0
13	30.0	33.4	37.5
14	32.5	35.9	40.0
15	35.0	38.4	42.5
16	37.5	40.9	45.0

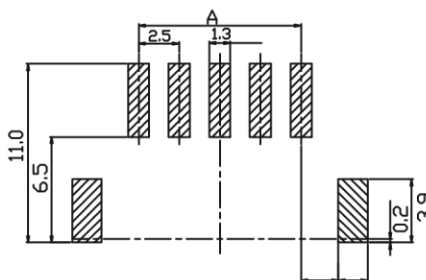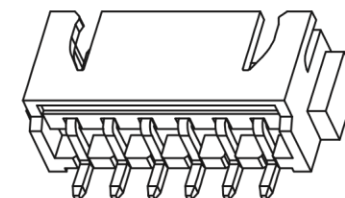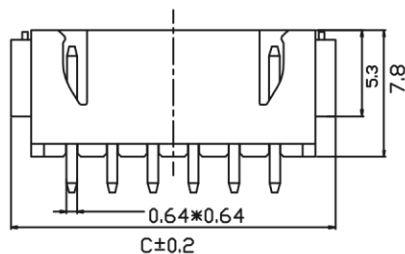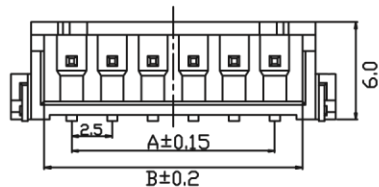

PCB LAYOUT

METRIC		Han Electronic	
DRAWER	ELLEN (GLH)	TITLE PITCH 2.50mm, 2~16PINS CRIMP STYLE, SMT TYPE SHROUDED HEADER (H=6.00mm)	
APPROVER	SKY (GLH)		
DIMENSIONS ARE IN MILLIMETERS TOLERANCES		PRODUCT NUMBER RWB22-32J※0※※N3	
DO NOT SCALE DRAWINGS		THIRD ANGLE PROJECTION	
SIZE	A4	SCALE	NONE
REV.	1	SHEET	1 OF 1