

※NOTES※

MECHANICAL

- ① HOUSING : THERMOPLASTIC-LCP, UL94V-0, BLACK
- ② COVER : THERMOPLASTIC-LCP, UL94V-0, BLACK
- ③ CONTACT(S) : PHOSPHOR BRONZE C5191-H


SPECIFICATION

- ① RATING : 1 AMPHRE, 50V AC
- ② INSULATION RESISTANCE : 1000MΩ MIN.
- ③ CONTACT WITHSTANDING VOLTAGE : 500V AC FOR 1 MINUTE
- ④ OPERATION TEMPERATURE : -40°C ~ +85°C
- ⑤ WAVE-SOLDERING PEAK TEMPERATURE : THERMOPLASTIC-LCP = 265±5°C FOR 10 SECONDS
- ⑥ THIS IS A RoHS COMPLIANTS PRODUCT.



ORDER INFORMATION

ZCR05 - 11 × R008P3

PLATING
 0~Au 0.2~1μ ON CONTACT AREA
 1~Au 3μ ON CONTACT AREA
 4~Au 15μ ON CONTACT AREA

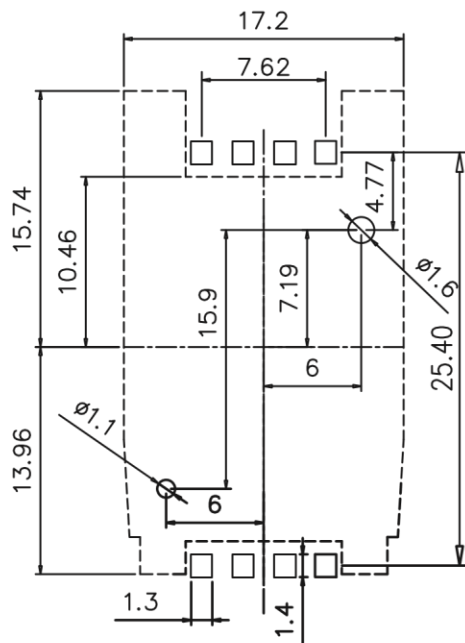

RECOMMENDED PCB LAYOUT

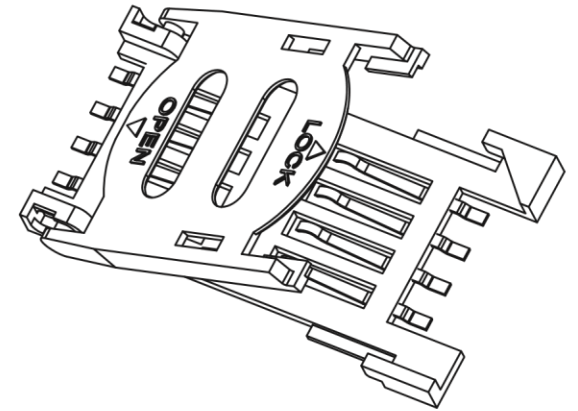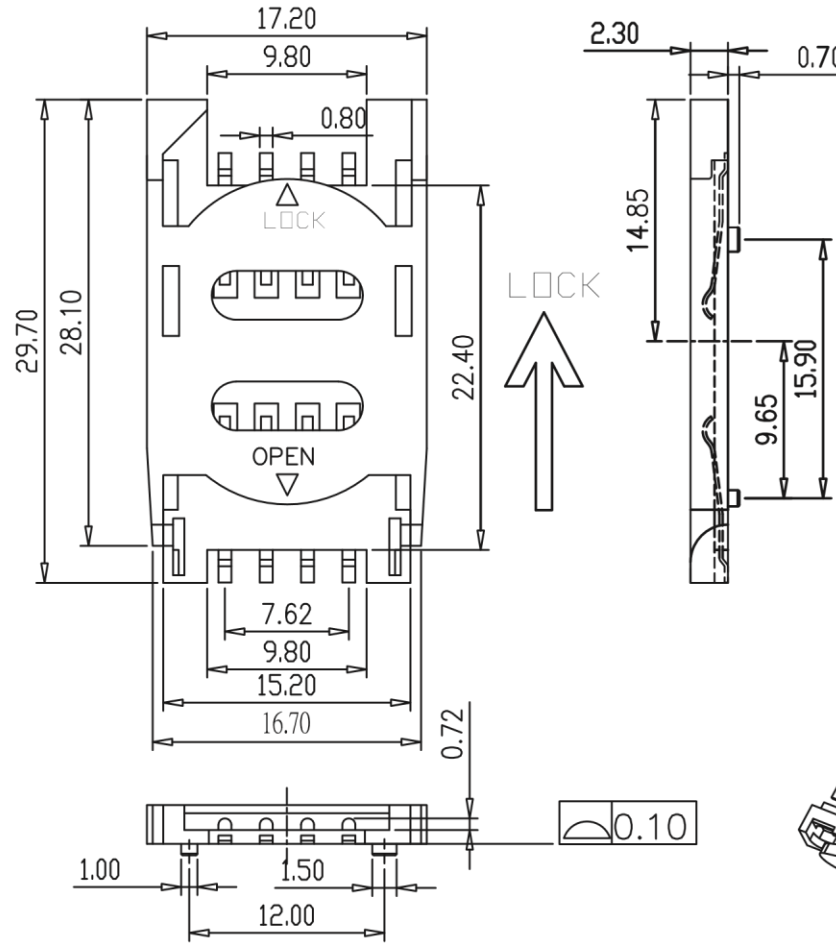

QUALITY CONTROLING 品質管理 THE SYMBOL IS ★	METRIC		Han Electronic	
	DRAWER	Y. TOMITA		
RoHS COMPLIANT RoHS 対応	APPROVER	P. TURNEAU	TITLE SIM CARD CONNECTOR 8 PINS, SURFACE MOUNT COVER LOCK TYPE	
DIMENSIONS ARE IN MILLIMETERS TOLERANCES	X. ---- X.X ±0.25 X.XX ±0.15 X.XXX ±0.10 ANGLES ±2°			
DO NOT SCALE DRAWINGS 縮尺不可	THIRD ANGLE PROJECTION 		PRODUCT NUMBER ZCR05-11×R008P3	
SIZE A4	REV.	SCALE NONE	SHEET 1 OF 1	